



P1

Surround Speaker

Technical Specifications



- Procella “Mini” ideal for small, discrete surrounds and small room/nearfield playback
- Main speaker for small rooms and surround speaker for small to mid-size rooms
- .75” driver on circular waveguide: 110° circular dispersion
- 5.5” high-output woofer driver
- Sealed-box design
- Identical Voice™ timbre-matched to all Procella models
- Can be oriented horizontally or vertically
- Black or White cabinet finish

Impedance 8 Ohms nominal

Power handling
Continuous 75 Watt

Sensitivity
1m/1W 89dB

Maximum SPL 105dB

Frequency response
-3dB points 80Hz and 20kHz

Dispersion Controlled directivity
110° circular from 2.0kHz

Crossover Asymmetrical and phase aligned
3.5 kHz, BSC

Components
Midrange 5.5” coaxial driver with 35mm voice
coil in 4.8 litre sealed box

High Frequency 19mm driver on a circular waveguide

Connectivity Gold plated large diameter binding posts

Wall Mount 127 x 70mm M4 threaded inserts for
standard 2.75” x 5” speaker mount.
Three keyholes provided for both vertical
and horizontal mounting.

Finish White or Black semi-matte painted finish.
MDF construction, cloth grille.


Dimensions
HxWxD 8.27” x 13.4” x 3.94/4.72”
210 x 340 x 100/120 mm
7 degree baffle angle

Shipping Carton
HxWxD 11.81” x 7.87” x 15.75
300 x 200 x 400 mm

Net weight 9.25 Lbs / 4.2 Kg

Shipping weight 11.0 Lbs / 5.0 Kg

P1

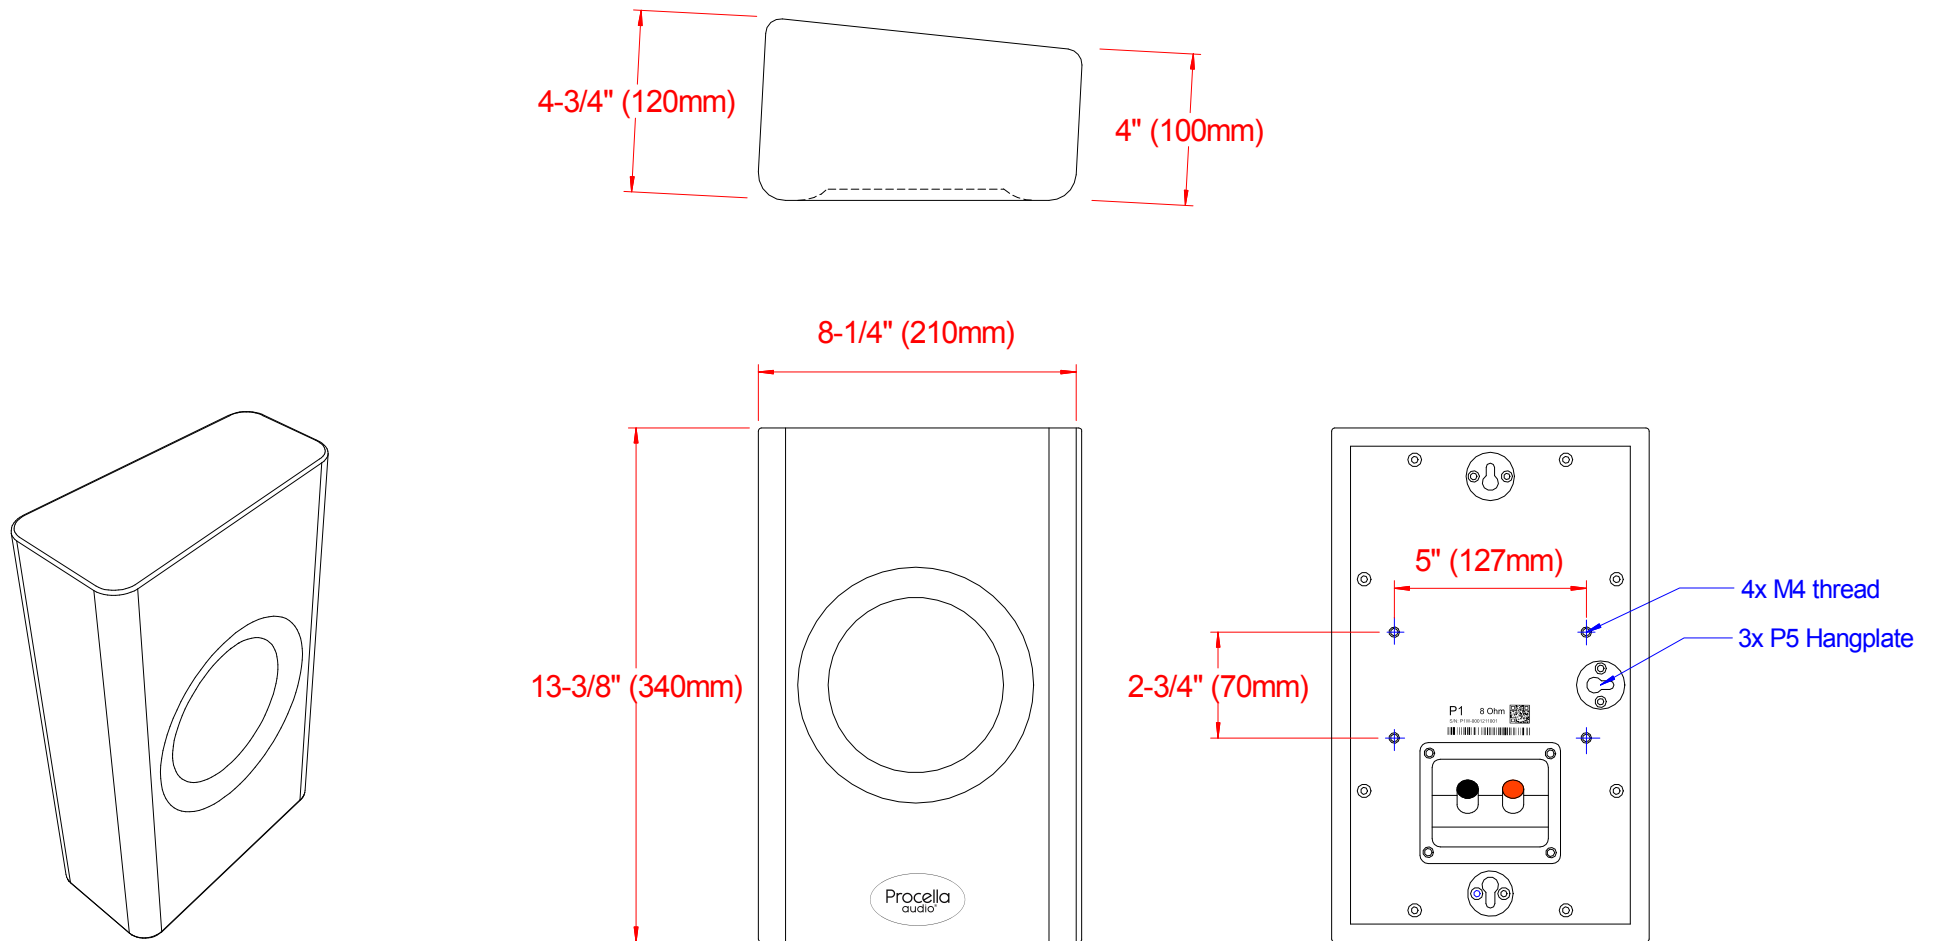

Sides, Top, Bottom: 12mm MDF
Front: 15mm MDF
Black, White semi-matte Paint
Weight = 4,2 Kg
Box volume = 4,8L
Package: 300x400x200mm



Procella P1: Dimensions
Anders Uggelberg, 12Aug-19
UPD:
Scale 1:5 (PDF/JPG-file not to scale)
P1_ext_dim.CAD