



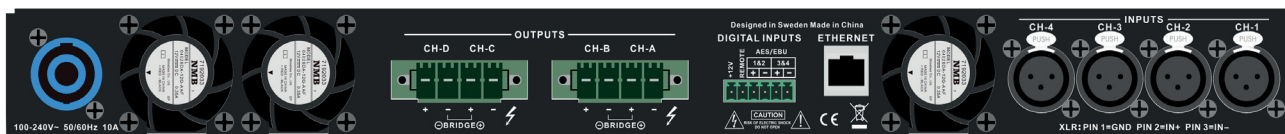

# DA03-DSP

Procella's ultimate high-power amplifier with 4x280W or 2x1.050W at 8ohms  
Factory presets optimize performance of Procella's speakers and subwoofers

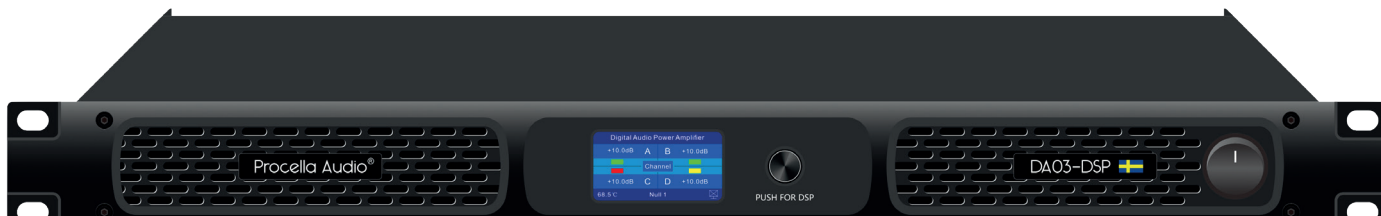

## INTRODUCTION

This massive output power amplifier has the horsepower to bring out every ounce of performance designed into each of Procella's high-output speaker and subwoofer models. Procella's DA03-DSP can be used as a four-channel amplifier to produce 4x280W (8 ohms) and 4x500W (4 ohms), but switch to bridge mode, and it will deliver 2x1.050W (8 ohms)! In a single rack unit, this power station ensures maximum output and dynamic range, especially for Procella Full-range loudspeakers. Factory presets enable multiple configurations with Procella's high output speakers and subwoofers.

## TECHNICAL SPECIFICATIONS

<b>Output power</b> (THD+ N=1%, 1kHz continue sine wave, all channel driving)	4x 280W at 8 ohms 4x 500W at 4 ohms	<b>Operating Voltage/Frequency</b>	Universal Mains 90-260V, 50-60Hz
<b>Output power (bridged)</b> (THD+ N=1%, 1kHz continue sine wave, all channel driving)	2x 1.050W at 8 ohms	<b>Power Consumption</b> <b>All channels driven</b>	idle 40W, 1/8 full power 195W
<b>Max. Output current</b>	25A peak	<b>DSP</b> <b>For all channels</b>	Level, Parametric eq, Delay, matrix limiter and FIR filter
<b>Signal To Noise-Ratio</b>	>104 dB (default gain, A-weighted, 20 Hz-20 kHz, 8 Ω)	<b>Carton content</b>	Mains power cable Euroblock output connectors User guide / Adhesive rubber feet 4x
<b>THD+N (typical)</b>	<1% (1kHz continue sine wave, all channels driving)	<b>Dimensions</b> W x H x D Net weight	483 x 45 x 370 mm (1U) 19" x 1.7" x 14.6" 9,0 Kg / 19,8 Lbs
<b>Frequency Response</b>	20 Hz - 20 kHz (+0/-0.5 dB 8 Ω load, 3 dB below rated power)	<b>Shipping Carton</b> W x H x D Shipping weight	570 x 135 x 515 mm 22,44" x 5,31" x 20,28" 10 Kg / 22.05 Lbs
<b>Protection Circuits</b>	Short circuit protection, DC protection Limiter Under voltage protection Over temperature protection Overload protection	<b>Certification</b>	FCC and CE
<b>Power Supply</b>	Global Power Supply with APFC (Active Power Factor Correction)	<b>Assembly</b>	Designed by Procella Audio Manufactured in China
		<b>Improved design 2024</b>	2x AES3 input (4 channels) Large Euroblock loudspeaker connectors 12 Volt remote On/Standby Improved fan control Colour display 40 Presets