



V6

Subwoofer with External Amplification

Technical Specifications



- Extremely high output subwoofer for the largest rooms
- V6™ Power:
 - Six 10 inch professional audio long-throw drivers with 65mm (2.5 inch) voice coils
- 2,400W of amplification using external Procella DA06-DSP power amplifier
- Maximum output 133 dB @ 50Hz continuous with 137 dB peak output
- -3 dB point 18 Hz
- High sensitivity: 99 dB 1m/1W
- V-loaded driver configuration increases output, lowers distortion and improves transient response
- Push-pull driver configuration cancels even-order harmonic distortion
- Sealed-box design with heavily internally-braced MDF cabinet
- Shallow cabinet depth at 11.8 inches / 300mm

Frequency Response

-3 dB 18 Hz

Maximum SPL

@ 50 Hz 133 dB continuous
137 dB peak

Components

Procella V6™ configuration:
Six Long-throw 10 inch Neodymium woofers with 65mm (2.5 inch) voice coils in 150 litre sealed box

Impedance

3 inputs; 6 ohms nominal each input

Power Handling

700 watts per input minimum
> 4KW maximum total

Sensitivity

99 dB 1m/1W

Amplification

800W x 3 with external
Procella DA06-DSP amplifiers

Connectivity

3 pair heavy-duty gold-plated binding posts

Construction

Void-free MDF; internally cross-braced

Finish

Painted black finish with fabric grille

Dimensions

HxWxD 41.3" x 26.4" x 11.8"
1050 x 670 x 300 mm

Shipping Carton

HxWxD 45.3" x 29.75" x 15.75"
1150 x 755 x 400 mm

Net weight

121.3 Lbs / 55.0 Kg

Shipping weight

132.3 Lbs / 60.0 Kg





Included

Damper feet, installation guide

Assembly

Sweden; 100% QC testing

V6

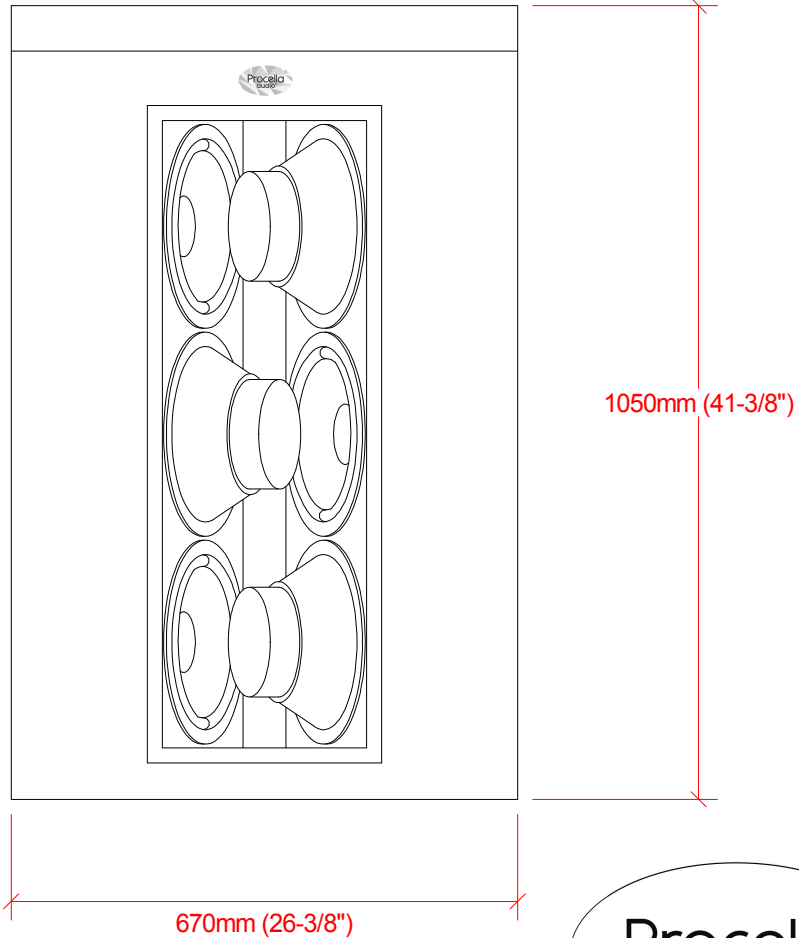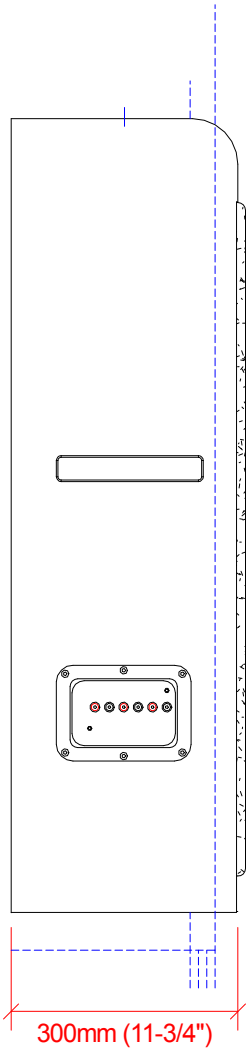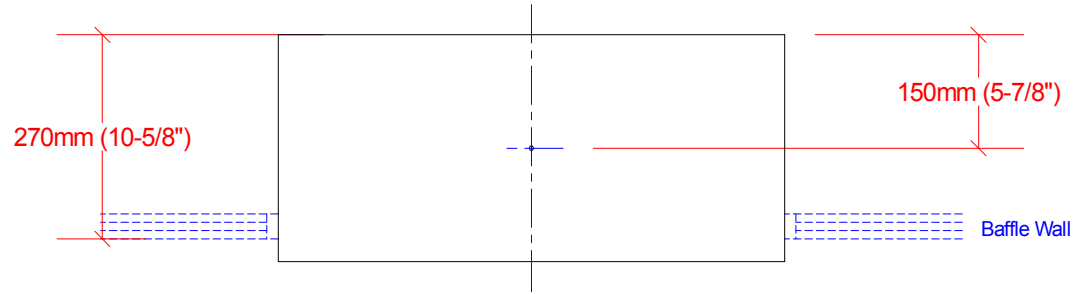

Baffle wall cut-out = 1'120mm x 700mm (44.0"x22.0")
Weight = 55kg



Procella V6 External dimensions
Anders Uggelberg 25/7 -17
UPD:2/8, 10/7-18
V6_ext_dim.CAD
Scale 1:10 (PDF/JPG-file not to scale)